


EM 350 - GREEN ROOF EDGING

#901328_F150_09



Detail Drawing

■ Green up the roof!

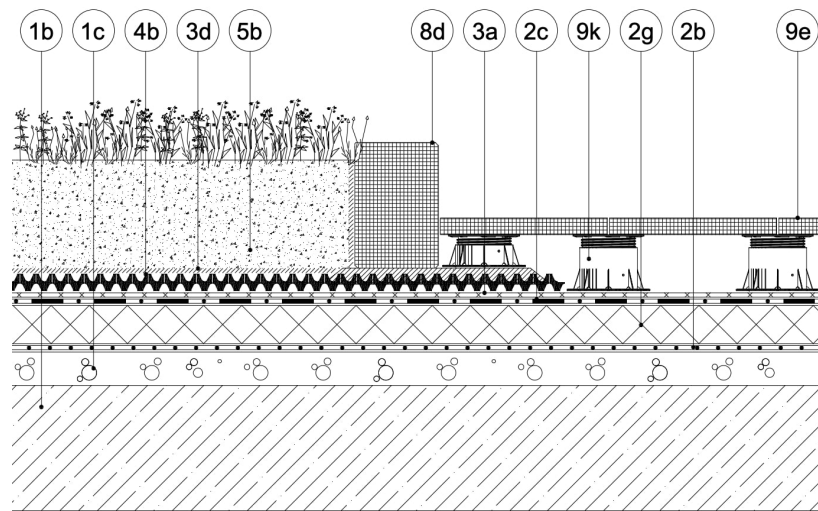

Decking constructions:

- 1b - Reinforced concrete structure
1c - Slope-forming layer

Water isolation:

- 2b - FLW-400 ext. Root protection
2c - Waterproof membrane
2g - Expanded PS-foam heat insulation

Geotextile layers:

- 3a - VLU-300 mechanical protecting layer
3d - VLR-130 separating filter layer

Drainboards:

- 4b - DD-40H Retention Board

Growth medias:

- 5b - SIM-30 extensive growth medium

Edging element:

- 8d - RDA-40 edging piece 16"

Terraces accessories:

- 9e - Concrete slab
9k - SLH-145 terrace pedestal

Description of section:

To accommodate deeper intensive soil depths, installation of a pony wall is typically required. Though not mandatory, it is best if this structure is connected directly to the roof deck, with building envelope layers running uninterrupted from edge to edge. Pony walls can be made out of precast units laying in crushed stone beds, or using poured-in-place concrete curbs, landscaping timbers, etc. If necessary, a concrete footing can be poured using the dd40h as the base, ensuring unhindered drainage under the wall. Adjustable pedestals can be installed over dd40h drainage boards, if filled with the appropriate drain aggregate. Please verify the load-bearing capacity of the underneath layers such as thermal insulation.

DIADEM USA, Inc.

~~721 NW Ninth Avenue, Suite 400, Portland, OR-97209~~
~~E-mail: info@diademusa.com. Web: www.diademusa.com~~