


DiaDrain-40H

1-5/8" Height, High capacity, Flow-delay Retention Board


310224

KEY FEATURES

- High storm water retention and storage capacity, 0.501 gal/sqf
- "Stepped barrier" design slows run-off velocity, reducing pressure on public infrastructure.
- Recessed evaporation vents improve ventilation under the system.
- Negligible material waste reduces costs and enhances profitability.
- Increased contact area reduces overall surface pressure.

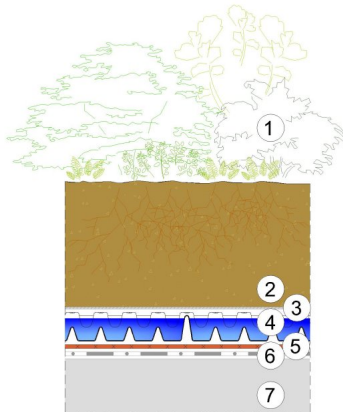

(1)Vegetation, (2)Growing media, (3)VLF 150/200 filter layer, (4)DiaDrain-40H, (5)VLU 300 /VLS 500 mechanical protection layer, (6)Root resistant waterproofing membrane, (7)Roof construction

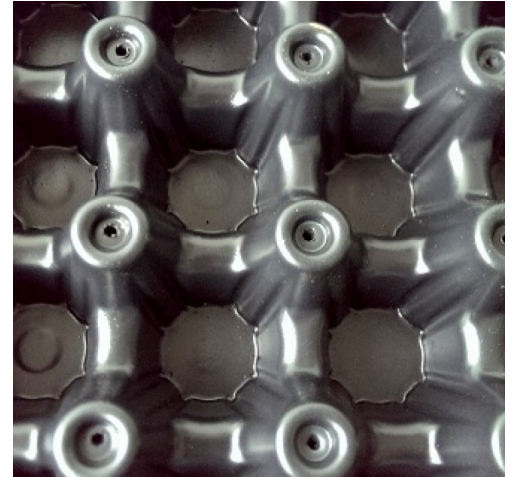

APPLICATION

DiaDrain-40H is designed for high water retention and drainage capacity of low slope roof surfaces, including vegetated areas and hard-surface pedestrian areas of semi-intensive and intensive green roofs. The "stepped barrier" design of DD-40H causes the retention cups to fill with water in a similar fashion to filling an ice cube tray, enabling their flow-delay and retention functions. DD-40H boards are laid overlapping one row of cups with the adjacent board, starting at the bottom of the roof slope and moving upward.

SPECIFICATION

DD-40H, high capacity 1-5/8 inch height retention board composed of recycled high-impact polystyrene. Stepped barrier design with deep-drawn recessed evaporation vents and water channel system on the underside. Compression strength: 6,922 lbf/sqft (unfilled), filled at 10%: 12,043 lbs/sqf, the guaranteed minimum of the compression strength: 4,300 lbs/sqf according test certificate issued by SKZ-Testing GmbH, Würzburg, Germany, Water-flow capacity 0.15 gal/(secxft)@ i=0.02, (according to EN ISO 12958), Water-retention capacity 0.501 gal/sqf, Microbiological resistance tested (EN 12225), Fire resistance classification "Broof(t2)"(EN 13501-5). Weight per unit Area: 57.80 oz/sqf; Board size 6 8-5/16" x 3 4-7/8" x 1-5/8" (LxWxH); Packaging: 4,144 Sqft/Pallet



TECHNICAL DATA

| | |
|---|-----------|
| Board Area: (sqft) | 22.835 |
| Water retention capacity: (gal/sqft) | 0.501 |
| Board Height: (inch) | 1 5/8" |
| Weight per unit Area: (oz/syd) | 57.80 |
| Board Width: (inch) | 3 4-7/8" |
| Board Length: (inch) | 6 8-5/16" |
| Water flow rate (i=0.02): (gal/(ft x sec)) | 0.15 |
| Material Requirement: (sqft/sqft) | 1.01 |
| Flammable classification: | Broof(t2) |
| Installation standard: (hr/sqft) | 0.015 |
| Compression Strength (unfilled): (lbs/sqft) | 6,922 |

Reviewed: 2020-01-28 17:26:24



DIADEM USA, Inc.
721 NW Ninth Avenue, Suite 400, Portland, OR-97209
info@diademusa.com • www.diademusa.com



Green Up the Roof!